

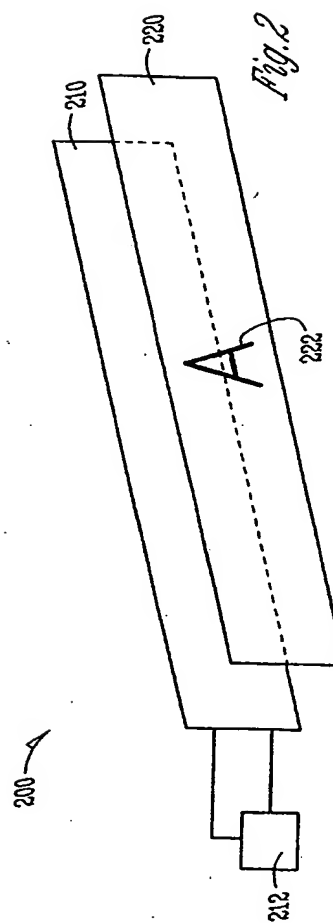
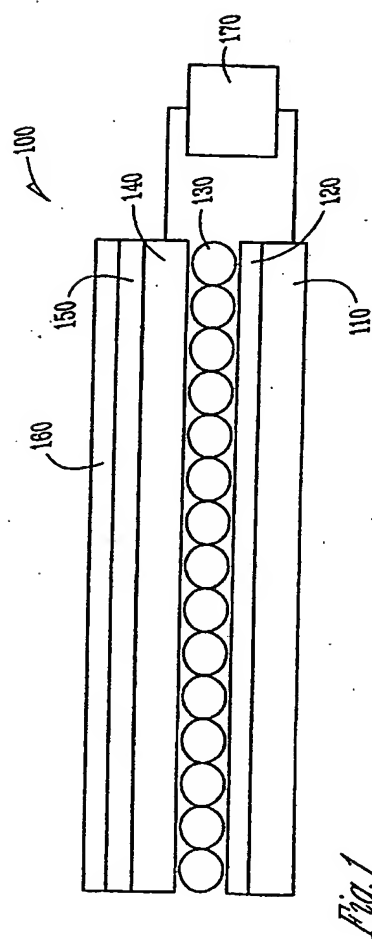
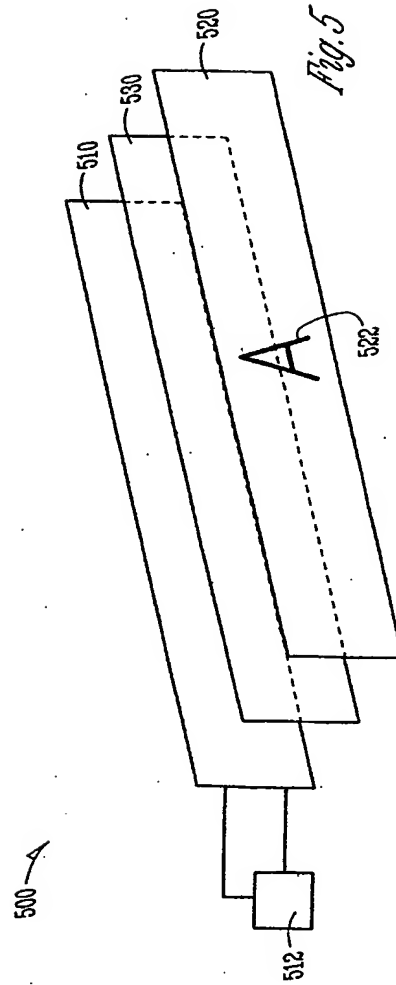


1/12



2/12

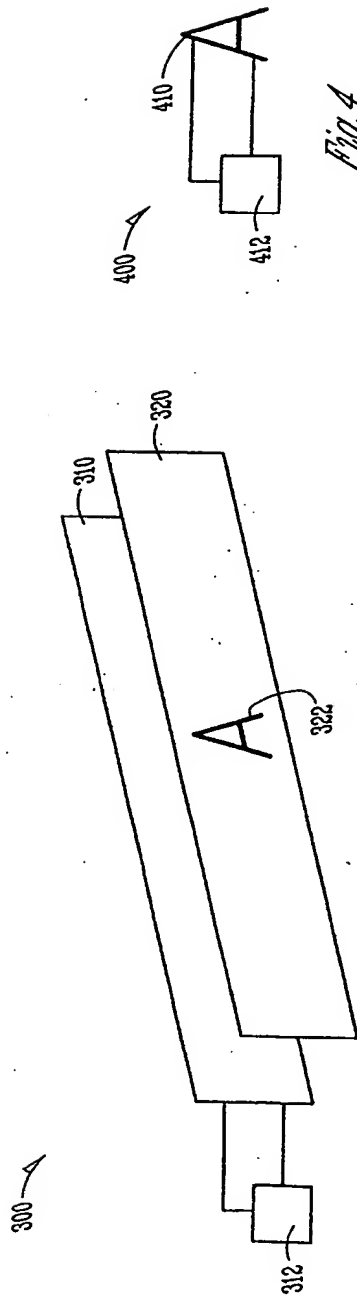

3/12

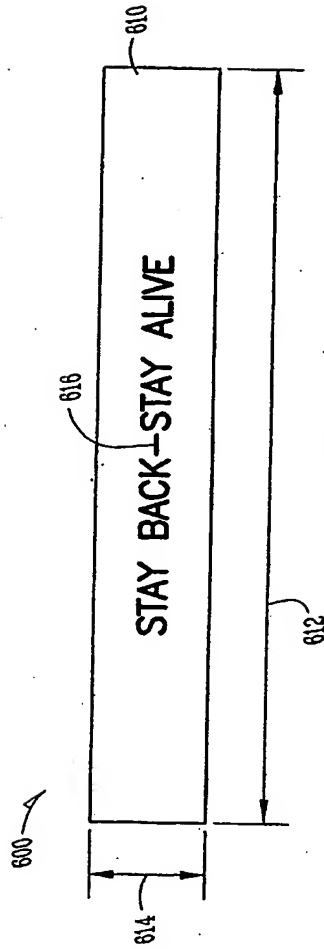


Fig. 6

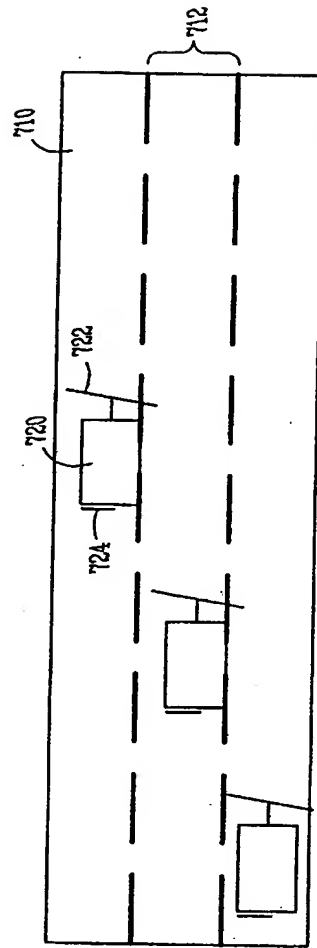


Fig. 7

4/12

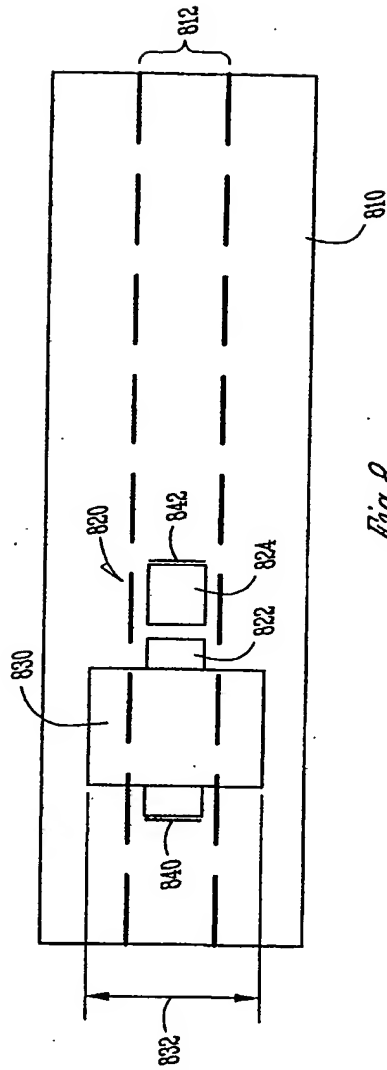


Fig. 8

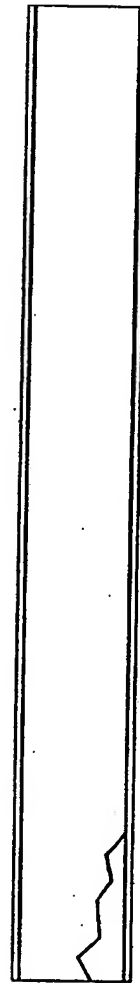


Fig. 9

5/ 12

Stay Back Stay Alive Sign

## Lamp Baseline Assumptions:

- Lamp Size: 8.5" x 72"
- Construction: Hybrid
- Lit Color: Yellow has a yellow on/off color
- Interconnection: Crimp with Wires
- ITO Substrate Thickness: 0.007" (0.178mm)
- Nominal Lamp Thickness: 0.015" (0.38mm)
- Part Label: On packaging
- Adhesive: None
- Insulator: 0.0015" tape (a thicker laminate may be required for durability)
- Overprint: TBD

Power Supply Specs

|        |  |
|--------|--|
| Driver | 2-Amp or 5-Amp driver<br>(120Vrm/60Hz input »<br>140Vrms/600Hz output) |
|--------|--|

*Fig. 10*

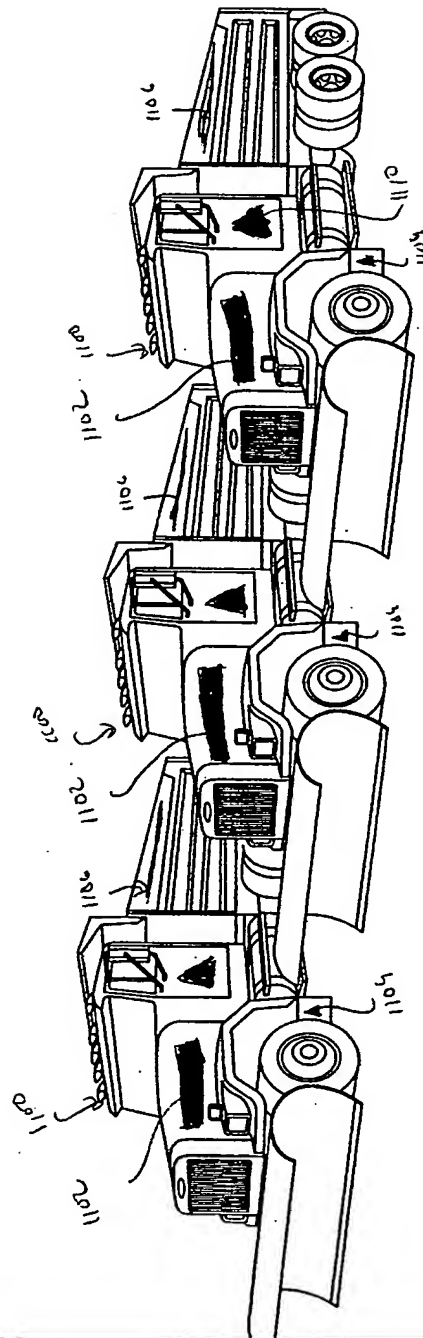


FIG. 11

7/12

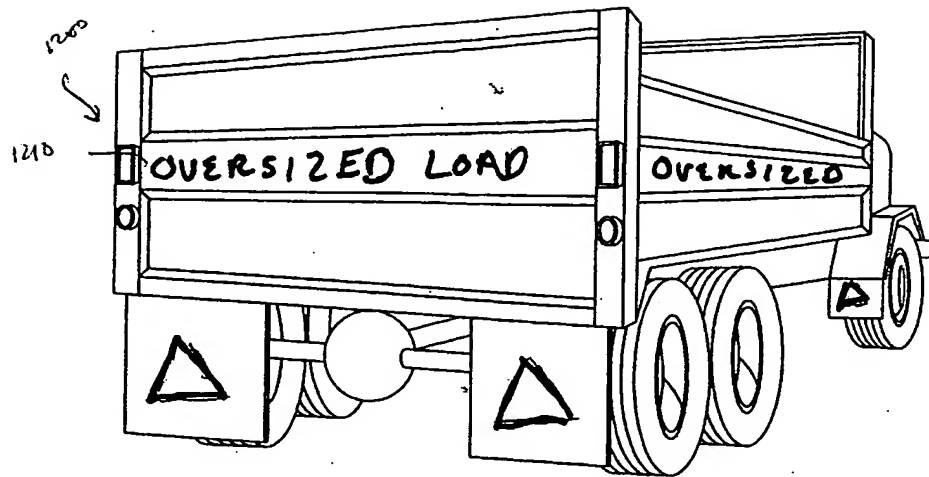


FIG. 12



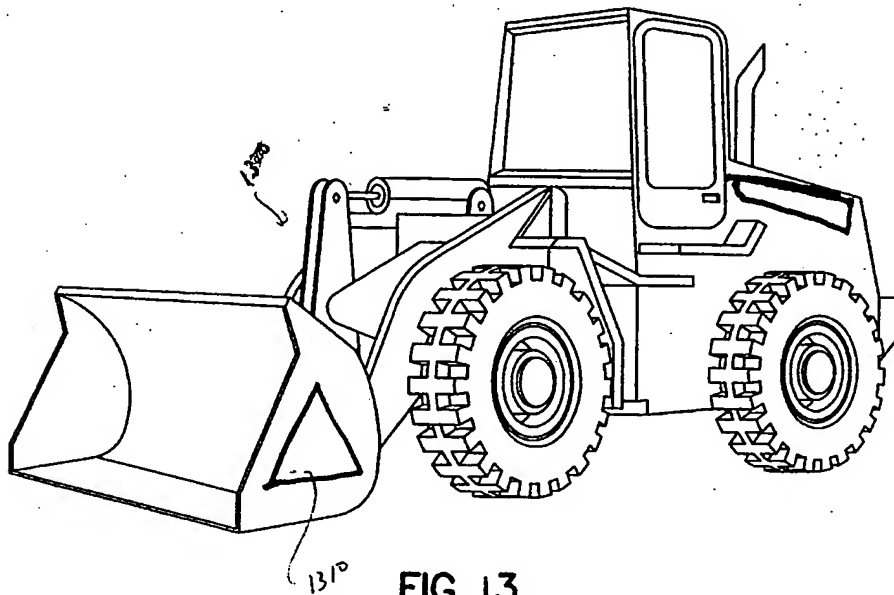


FIG. 13

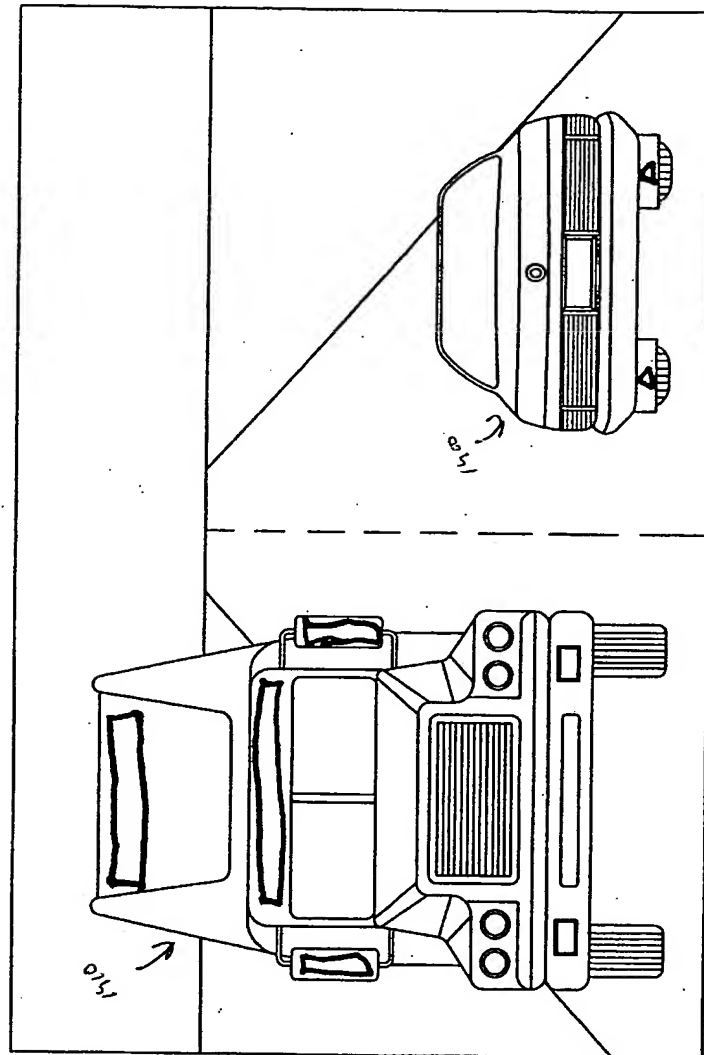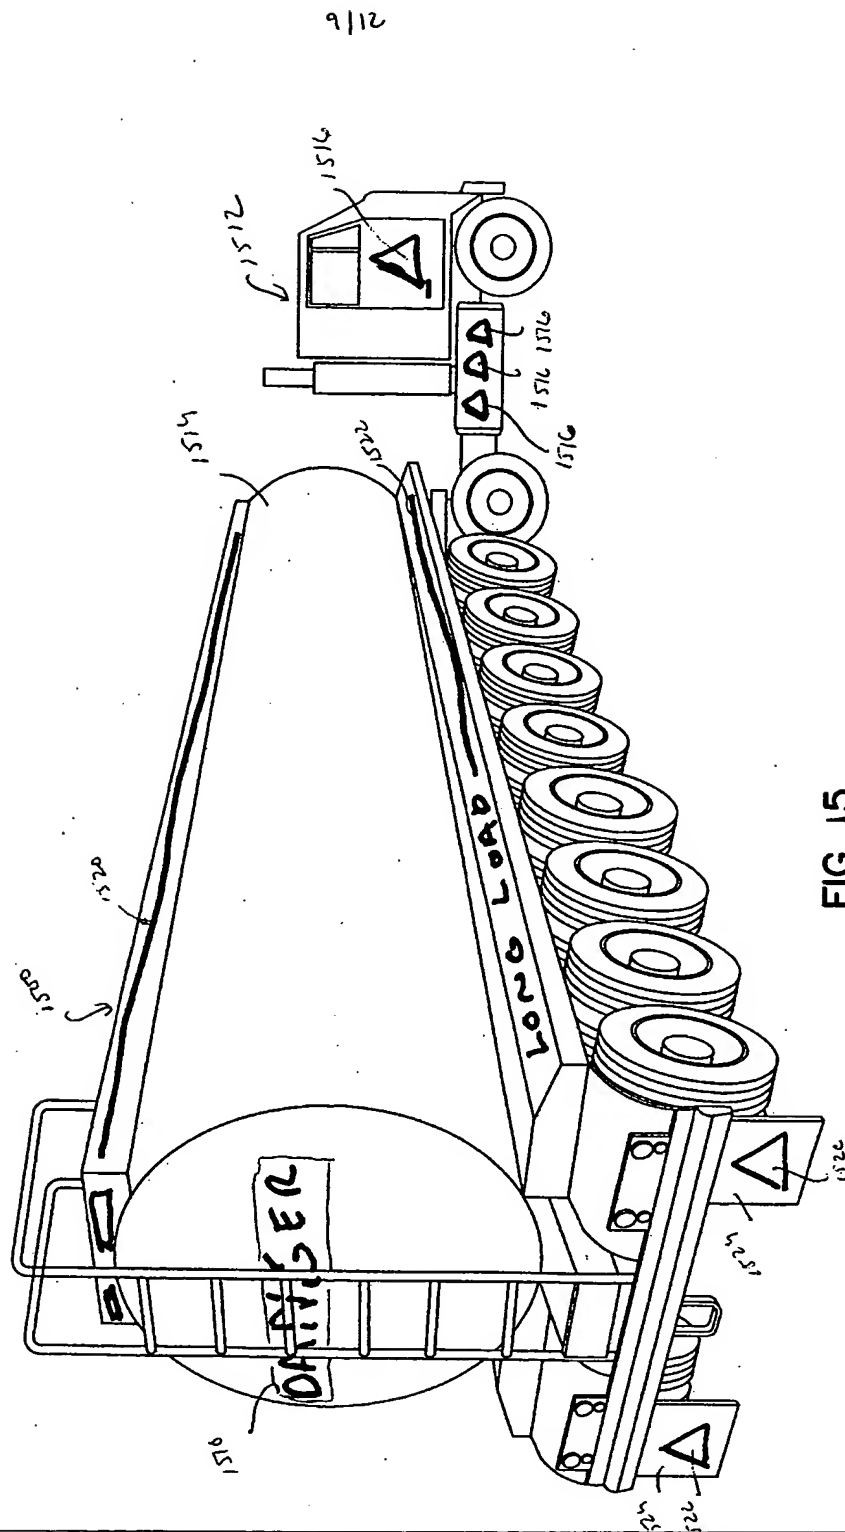

21/8





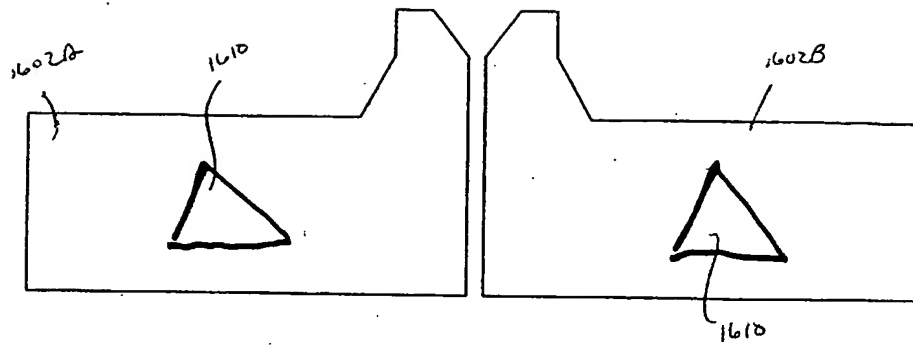


FIG. 16A

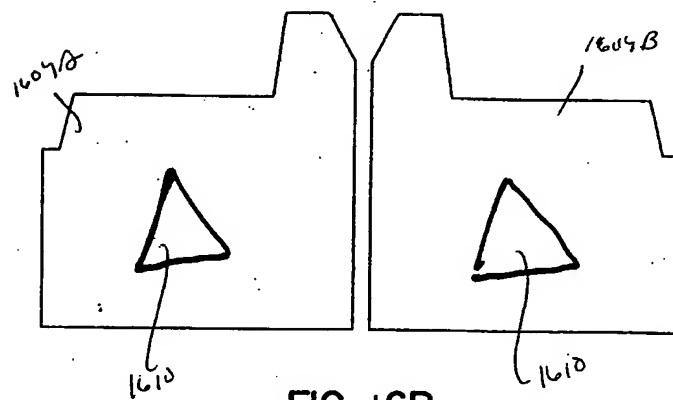


FIG. 16B

11/12

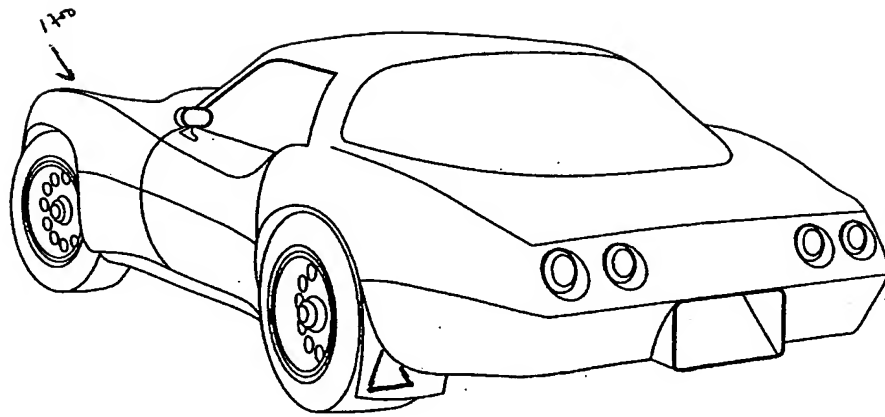


FIG. 17

12/12

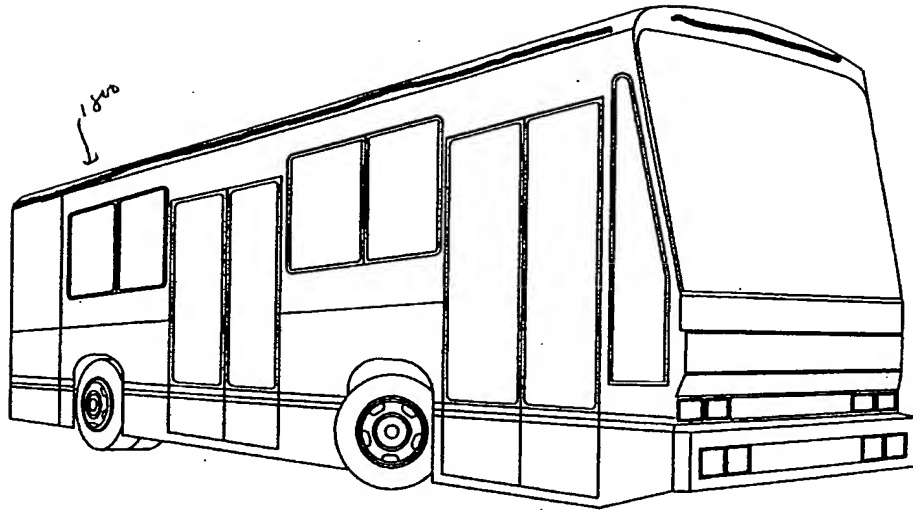


FIG. 18

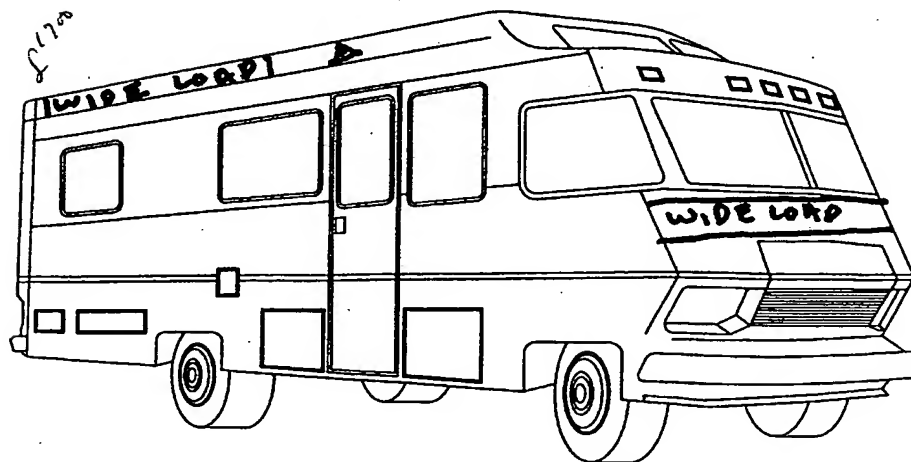


FIG. 19